



G Series

G 系列



Foreword

Thank you for purchasing this Golden Eagle Product!

G Series video lights are excellent for product shooting, photojournalistic and video recording, etc. It creates stable light resource and even illumination for photography.

Features

- 200/300/400/500watt LED bulbs guarantee high light brightness
- Several light effect modes; like thunder, flame, police and so on
- Two light modes: silent (cooling fan works quietly); normal (cooling fan works normally)
- The color rendering index is over 96 and R9 is over 50, presenting the objects authentically
- Large-sized LCD panel. Settings auto saved. Chinese and English two version menus
- With temperature control function to prevent overheating
- Built-in fan to offer excellent heat dissipation
- Can use app to control the brightness of the light
- With DMX512 Control

For your safety

- ⚠ Do not place in high temperature or high humidity conditions.
- ⚠ If this product overheats, it will cease operation and resume working after cooling down. This is due to the built-in overtemperature protection.
- ⚠ Do not handle with wet hands, immerse in water, or expose to rain.
- ⚠ Do not disassemble or modify this product. Should the product break open as the result of a fall or other accident, send the defective back to authorized service center for inspection and maintenance.



When heatsink' temperature is over 75 Celsius degrees, the video light will stop working.

Technical data

Date

Model	G200Bi	G300Bi	G500Bi
Power(WS)	200W	300W	500W
CRI	96	96	96
TLCI	97	97	97
Luminous Flux	23000LM	31500LM	53000LM
Color Temperature	2700-6500K	2700-6500K	2700-6500K
Cooling Fan	YES	YES	YES
APP Control	YES	YES	YES
AC Power Supply	AC 190-240V	AC 190-240V	AC 190-240V
Light Effects	8	8	8
Cooling Fan Mode	mute/normal	mute/normal	mute/normal


DMX Reference Guide

CHANNEL	VALUE	%	FUNCTION
1	0-255	0-100	DIMMER 0-100%
2	0-255	0-100	CCT 2700K-6500K
3	0-55 56-255	0-21.5 21.9-100	STROBE OFF Variable Strobe (0.5-->20Hz)

Accessories including

Power Cord*1

Protector *1

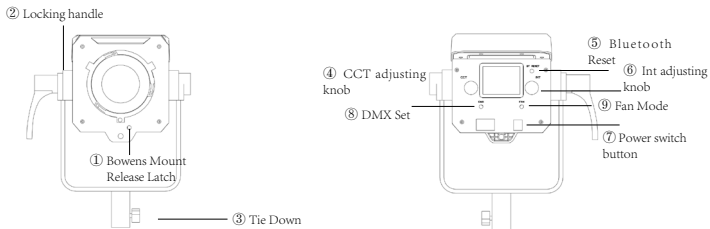

Operation

Insert the power plug cord into power socket, and power switch on. The indicator light will be auto bright. The LED with cooling fan will be regular work.

1. Setting up the light

Adjust the lamp body to the appropriate height, rotate ③ tie-down to fix the lamp body on the tripod, then adjust the lamp body to the required angel, and tighten the ② locking handle.

2. Detaching /attaching the reflector/other accessory

Push the ① Bowens Mount Release Latch , and rotate the reflector to pull it out. Reverse rotation will put the reflector into.

3. INT

Rotate the ⑥ INT adjusting knob to adjust the brightness with 1% variable, and the brightness change range is (0~100) %, and display the change of (0~100) % in real time on the LCD display. Click the ⑥ INT adjustment knob to quickly switch the brightness level: 0% → 25% → 50% → 75% → 100% cycle switch.

4. CCT

Rotate the ④ CCT adjusting knob to increase or decrease with 100K as the change amount to change the current CCT value (2700K-6500K), and display (2700K-6500K) CCT value in real time on the light body display screen. Click the CCT adjustment knob to quickly switch the color temperature shift.

5. BlueTooth Settings

Long press the ⑤ Bluetooth reset button to reset Bluetooth. Then open the app to connect the light.

6. Light Effects

In the APP, 8 light effects can be changed; E1-8 stands for 8 different light effects: Lightning, Fire, Faulty Bulb, Gradual, SOS, Police Car, Firework, TV.

7. Save&Reading Data

Long press the ⑥ INT adjusting knob to save the current light data into the system. Press ⑤ Bluetooth reset button to quickly set the light into the saving data.

8. DMX Channel Setup

Press the ⑧ DMX button to set the DMX channel. Rotate ④ knob set up the channel, press the ⑧ DMX button again to save the DMX channel.

9. Cooling Fan Mode

Press the ⑨ FAN button to switch the fan mode: Low fan mode(for video marker) and High fan mode(for photographer).

APP Control

1. APP Download

Download "Tuya Smart" APP to control the light



Scan to download




Tuya Smart

2.APP connect

Press "Channel" button for 5 seconds to reset the Bluetooth of the light.

OPEN TUYA APP, press "+"button, press "Add Device"button to connect the light.

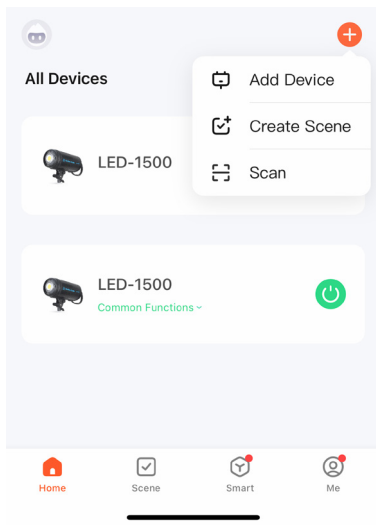

*This requires the phone's Bluetooth to be turned on

前言

感谢您购买金鹰产品！

G 系列摄影灯光源稳定，显色性好，功能强大，非常适用于影棚拍摄、采访布光、静物拍摄以及视频拍摄等。

- 200/300/400/500 瓦大功率 LED 灯珠亮度高，光源稳定
- 多种灯光特效模式可以调节，比如可以模拟雷电，火焰，闪烁等效果
- 二种灯光风机模式：静音模式（风机低速运作），正常模式（风机高速运作）
- 显色指数高达 96 以上，R9 高达 50 以上，真实还原物体色彩
- 液晶屏精准显示，参数自动保存，中英文菜单调节
- 内置风扇高效散热，具有温度控制保护，延长灯珠使用寿命
- 使用 APP 调节灯光亮度
- 带 DMX512 控制

注意事项

- ⚠ 请勿将摄影灯放置在高温、高湿的地方。
- ⚠ 此机有温度保护功能，当温度过高时进入保护状态，当温度降低后恢复正常。
- ⚠ 请勿用湿手接触产品，亦不可将产品浸入水中或暴露于雨中。
- ⚠ 请勿拆卸或改造产品。若本产品因为摔落或其他意外事故造成破损，请将产品送至厂家授权的维修中心进行检查维修。



当灯体内温度超过 75°C 时，设备会自动保护停止工作。待温度降低后可继续使用。

产品参数

参数

型号	G200Bi	G300Bi	G500Bi
功率	200W	300W	500W
显色指数	96	96	96
TLCI	97	97	97
100% 光通量	23000LM	31500LM	53000LM
色温	2700-6500K	2700-6500K	2700-6500K
散热系统	YES	YES	YES
APP 调节	YES	YES	YES
AC 电源供电	AC 190-240V	AC 190-240V	AC 190-240V
灯光特效	8 种	8 种	8 种
风机模式	正常 / 静音	正常 / 静音	正常 / 静音


DMX 通道表

通道	数值	%	功能
1	0-255	0-100	亮度 0-100%
2	0-255	0-100	色温 2700K-6500K
3	0-55 56-255	0-21.5 21.9-100	闪烁 闪烁关闭 可变闪烁频率 (0.5-->20Hz)

附件包含

电源线 *1

保护罩 *1

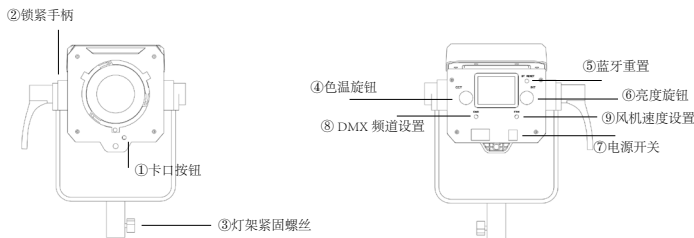

操作说明

将电源线插头插入电源插座，打开⑦电源开关，液晶屏点亮，LED 正常发亮，此时就可以进行正常工作。

1. 灯架固定

松开 ③灯架紧固螺丝，将灯头底座插入灯架内，锁死 ③灯架紧固螺丝。

松开 ②锁紧手柄 可以对灯光的角度进行调节，调节完成后锁死 ②锁紧手柄。

2. 附件安装

往后按住 ①卡口按钮，旋转灯光上的附件(反光罩，柔光罩)，可以取下或者安装灯光附件。

3. 亮度调节

旋转 ⑥亮度旋钮，以 1% 的变量调节亮度，亮度变化范围为 (0-100) %，并且在灯体显示屏上实时显示 (0-100) % 的变化。单击 ⑥亮度调节旋钮可快速切换亮度档位：
0% → 25% → 50% → 75% → 100% 循环切换。

4. 色温调节

旋转 ④色温旋钮，以 100K 为变化量增加或减少，改变当前色温值 (2700K-6500K)，并且在灯体显示屏上实时显示 (2700K-6500K) 色温值。单击 ④色温调节旋钮可快速切换色温档位：2700K → 3000K → 3500K → 4000K → 5000K → 5600K → 6500K 循环切换。

5. 蓝牙重置

长按 ⑤蓝牙重置 按键 5 秒进行重置蓝牙设备；然后打开 APP 连接手机；每次更换手机操控，都需要进行蓝牙重置。

6. 特效 & 静音模式

连接手机 APP 后，可以在 APP 后台调节灯光的 8 种特效：雷电，火焰，坏灯泡，渐变，SOS，警车，烟花，TV；

还可以在 APP 切换风机模式：正常 / 静音模式；当灯内温度过高时，静音模式无法被开启。

7. 存储 & 读取

长按 ⑥亮度旋钮 5 秒，可以存储当前灯光参数。快速按一下 ⑤蓝牙重置 按钮可以快速将灯光读取到存储的参数中。

8. DMX 频道设置

按下⑧号 DMX 频道设置按钮，进入 DMX 频道设置菜单，旋转④号旋钮进行频道设置，设置完成后，再安⑧号按钮进行确认。

9. 风机设置

按下⑨号风机速度按钮，可以调节灯光风机转速。有两档风机速度可以调节：

低速风机：适合直播，视频拍摄，对声音比较敏感的使用场景。

高速风机：适合拍摄，对声音不敏感的使用场景。

APP 说明

1. APP 下载

您可以在 APP Store 和安卓市场搜索“涂鸦智能”下载专业控制软件来控制灯具。



扫一扫下载



涂鸦智能

2. APP 连接

长按 ⑤蓝牙重置 按键 5 秒进行重置蓝牙设备；

打开涂鸦智能 APP，点击右上角 "+" 加号，点击 "添加设备"，进行连接。



* 连接时，请确保手机的蓝牙已经打开。



支持“涂鸦智能”APP 操控
DOWNLOAD "Tuya Smart"APP TO CONTROL

余姚金鹰摄影器材有限公司
Yuyao Golden Eagle Photography Equipment Co., Ltd.

地址 /Add: 浙江省余姚市丰南路 199 号
NO.199 Fengnan Road, Yuyao, Zhejiang, China
电话 /Tel: 0086-574-62815971 62815972
传真 /Fax: 0086-574-62815974
邮编 /P.C.: 315400
网址 /Website: www.goldeneagle1988.com
E-mail: sales@goldeneagle1988.com
Ins: [goldeneagle_photo](#)

