



LED Series Video Light

LED 系列摄影灯



Foreword

Thank you for purchasing this Golden Eagle Product!

LED Series video lights are excellent for product shooting, photojournalistic and video recording, etc. It creates stable light resource and even illumination for photography.

Features

- 150/200/300W LED bulbs guarantee high light brightness
- Several light effect modes; like thunder, flame, police and so on
- Two light modes: silent (cooling fan works quietly); normal (cooling fan works normally)
- The color rendering index is over 97 and R9 is over 50, presenting the objects authentically
- Large-sized LCD panel. Settings auto saved. Chinese and English two version menus
- With temperature control function to prevent overheating
- Built-in fan to offer excellent heat dissipation
- Can use app to control the brightness of the light

For your safety

- ⚠ Do not place in high temperature or high humidity conditions.
- ⚠ If this product overheats, it will cease operation and resume working after cooling down. This is due to the built-in overtemperature protection.
- ⚠ Do not handle with wet hands, immerse in water, or expose to rain.
- ⚠ Do not disassemble or modify this product. Should the product break open as the result of a fall or other accident, send the defective back to authorized service center for inspection and maintenance.



When heatsink' temperature is over 75 Celsius degrees, the video light will stop working.

Technical data

Daylight

Model	LED1500	LED2000	LED3200
Power(WS)	150W	200W	300W
CRI	97	97	97
TLCI	97	97	97
Luminous Flux	18000LM	23000LM	31500LM
Color Temperature	5600K	5600K	5600K
Cooling Fan	YES	YES	YES
APP Control	YES	YES	YES
AC Power Supply	AC 100-240V	AC 100-240V	AC 100-240V
Light Effects	8	8	8
Cooling Fan Mode	mute/normal	mute/normal	mute/normal

Bicolor 2700-6500K

Model	LED1500Bi	LED2000Bi	LED3200Bi
Power(WS)	150W	200W	300W
CRI	97	97	97
TLCI	97	97	97
Luminous Flux	18000LM	23000LM	31500LM
Color Temperature	2700-6500K	2700-6500K	2700-6500K
Cooling Fan	YES	YES	YES
APP Control	YES	YES	YES
AC Power Supply	AC 100-240V	AC 100-240V	AC 100-240V
Light Effects	8	8	8
Cooling Fan Mode	mute/normal	mute/normal	mute/normal

Accessories including

Power Cord*1,

Operation


Insert the power plug cord into power socket, and power switch on. The indicator light will be auto bright. The LED with cooling fan will be regular work.

1. CCT MODE


Press "Mode" button turn the light into CCT MODE, rotate "Dimmer" knob to change the brightness of the light;

Press "Mode" button again to change the light mode: SILENT, NORMAL.

In Bi models, press "Dimmer" turn light into the color temperature mode, rotate "Dimmer" knob to change the color temperature.(Only Bi models can change the color temperature)



Normal




Silent

*In SILENT MODE, the brightness of light can not change to 100%

2. EFFECT MODE

Press "Effect" button turn the light into light effects mode;

Press "Effect" button again to change the light effects, E1-8 stands for 8 different light effects: Lightning, Fire, Faulty Bulb, Gradual, SOS, Police Car, Firework, TV.



Effect mode

3. CHANNEL SETUP

In CCT mode, press "channel" can change the light channel from 1 to 4. When the channel of the light match up with the channel of the remota controller, it can be controlled by the remote controller. (Remote controller have to buy seperately)

APP Control

1. APP Download

Download "Tuya Smart" APP to control the light



Scan to download




Tuya Smart

2.APP connect

Press "Channel" button for 5 seconds to reset the Bluetooth of the light.

OPEN TUYA APP, press "+"button, press "Add Device"button to connect the light.

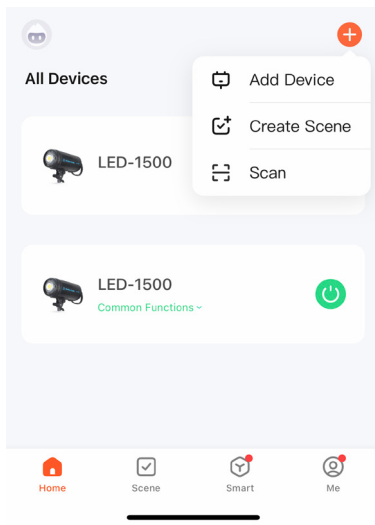

*This requires the phone's Bluetooth to be turned on

前言

感谢您购买金鹰产品！

LED 系列摄影灯光源稳定，显色性好，功能强大，非常适用于影棚拍摄、采访布光、静物拍摄以及视频拍摄等。

- 150/200/300W 大功率 LED 灯珠亮度高，光源稳定
- 多种灯光特效模式可以调节，比如可以模拟雷电，火焰，闪烁等效果
- 二种灯光风机模式：静音模式（风机低速运作），正常模式（风机高速运作）
- 显色指数高达 97 以上，R9 高达 50 以上，真实还原物体色彩
- 液晶屏精准显示，参数自动保存，中英文菜单调节
- 内置风扇高效散热，具有温度控制保护，延长灯珠使用寿命
- 使用 APP 调节灯光亮度

注意事项

- ⚠ 请勿将摄影灯放置在高温、高湿的地方。
- ⚠ 此机有温度保护功能，当温度过高时进入保护状态，当温度降低后恢复正常。
- ⚠ 请勿用湿手接触产品，亦不可将产品浸入水中或暴露于雨中。
- ⚠ 请勿拆卸或改造产品。若本产品因为摔落或其他意外事故造成破损，请将产品送至厂家授权的维修中心进行检查维修。



当灯体内温度超过 75°C 时，设备会自动保护停止工作。待温度降低后可继续使用。

产品参数

单色温

型号	LED1500	LED2000	LED3200
功率	150W	200W	300W
显色指数	97	97	97
TLCI	97	97	97
100% 光通量	18000LM	23000LM	31500LM
色温	5600K	5600K	5600K
散热系统	YES	YES	YES
APP 调节	YES	YES	YES
AC 电源供电	AC 100-240V	AC 100-240V	AC 100-240V
灯光特效	8 种	8 种	8 种
风机模式	正常 / 静音	正常 / 静音	正常 / 静音

双色温

型号	LED1500Bi	LED2000Bi	LED3200Bi
功率	150W	200W	300W
显色指数	97	97	97
TLCI	97	97	97
100% 光通量	18000LM	23000LM	31500LM
色温	2700-6500K	2700-6500K	2700-6500K
散热系统	YES	YES	YES
APP 调节	YES	YES	YES
AC 电源供电	AC 100-240V	AC 100-240V	AC 100-240V
灯光特效	8 种	8 种	8 种
风机模式	正常 / 静音	正常 / 静音	正常 / 静音

附件包含

电源线 *1

操作说明

将电源线插头插入电源插座，打开电源开关，液晶屏点亮，LED 正常发亮，风机正常工作，此时就可以进行正常工作。


1. 光照模式

按 Mode 按键进入光照模式，旋转 Dimmer 进行亮度调节；


再次按下 Mode 进行模式切换：静音模式，标准模式；

双色温版本中，按下 Dimmer 可以进入色温切换模式，然后旋转 Dimmer 进行色温调节。

（只有带 Bi 型号的灯光可以调节色温）。



标准模式




静音模式

* 在静音模式下，风机关闭运作，为降低灯内温度，灯光功率无法调节到 100%；当灯体温度过高时，风机会自动打开。正常情况不建议使用静音模式。

2. 特效模式

按 Effect 按键进入特效模式，此模式中，旋转 Dimmer 进行亮度调节；


再次按下 Effect 进行特效切换。E1-8 代表 8 种不同的特效：雷电，火焰，坏灯泡，渐变，SOS，警车，烟花，TV



特效模式

3. 频道设置

在光照模式中，按下 Channel 可以更改频道，总共有 4 个频道，用来和遥控器（需要单独购买）连接。当遥控器上的频道和灯上的频道一致时，遥控器可以控制灯光。



右上角 1 的位置显示是频道

APP 说明

1. APP 下载

您可以在 APP Store 和安卓市场搜索“涂鸦智能”下载专业控制软件来控制灯具。



扫一扫下载



涂鸦智能

2. APP 连接

长按 Channel 按键 5 秒进行重置蓝牙设备；

打开涂鸦智能 APP，点击右上角 "+" 加号，点击 "添加设备"，进行连接。



* 连接时，请确保手机的蓝牙已经打开。



支持“涂鸦智能”APP 操控
DOWNLOAD "Tuya Smart"APP TO CONTROL

余姚金鹰摄影器材有限公司
Yuyao Golden Eagle Photography Equipment Co., Ltd.

地址 /Add: 浙江省余姚市丰南路 199 号
NO.199 Fengnan Road, Yuyao, Zhejiang, China
电话 /Tel: 0086-574-62815971 62815972
传真 /Fax: 0086-574-62815974
邮编 /P.C.: 315400
网址 /Website: www.goldeneagle1988.com
E-mail: sales@goldeneagle1988.com
Ins: [goldeneagle_photo](#)

